



STANDARD




APPLICATIONS

This Landscape spot light series is an ideal solution for general site, landscape, sign and pathway lighting. Constructed of a die cast aluminum housing, and a polycarbonate lens with seamless silicone gasket to prevent leaks, it will stand up to many years of punishing environmental conditions. This flood light is 15W/20W/25W wattage selectable and 3K/4K/5K Kelvin selectable.

FEATURES


- * Color temperature: 3000K, 4000K, 5000K selectable
- * Wattage selectable: 15 / 20 / 25W
- * Lumens per watt: 120 Lm -3000 lumens @25W
- * Long-life LEDs provide 50,000 hours of operation with at least 70% of initial lumen output (L70)
- * Universal 100-277 VAC input
- * 0-10V dimming standard
- * Power factor > 0.90
- * Color rendering index > 80
- * Die cast aluminum housing with durable, Dark bronze powder coat paint.
- * Polycarbonate lens
- * Beam Angle : 40 degrees
- * Operating temperature: -40F - 113 F

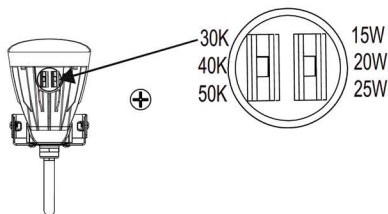

WARRANTY & DETAILS

- * DLC Premium listed
- * ETL Listed
- * Waterproof rating: Wet location
- * 5-year warranty on all electronics and housing

DIMENSIONS

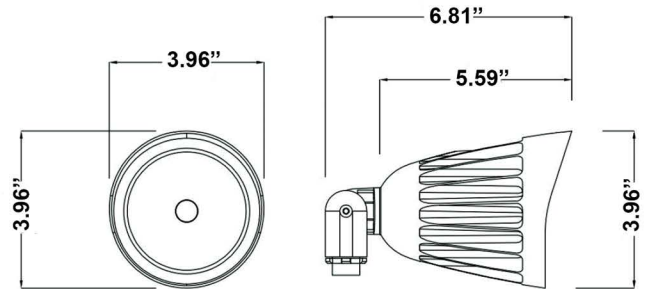

MOUNTING OPTIONS

- * Threaded pipe (NPT 1/2"), which attaches to a junction box, is standard
- * Optional spike-mount (DTH-LNDSL-BS) for ground mounting
- * Optional canopy-mount (CLL-FL17-PLATE) for attachment to flat surface. Enclosure is sealed with a water-tight, silicon rubber gasket



ORDERING INFORMATION

PART #	Kelvin selectable	Wattage selectable	Lumens	Lumens
CLL-BFL0125-25W-H-TCP	30K, 40K, 50K	15,20,25	3,000	120

Specifications and dimensions subject to change without notice

www.certifiedledlights.com
13375 N. Stemmons Frwy, Ste 300, Farmers Branch, TX 75234

Rev JULY 2024

PHOTOMETRIC DATA

