



## STANDARD



## APPLICATIONS

This VHB Wattage and Kelvin selectable Vapor tight light provides a gasketed dust-free and moisture free enclosure. It is a surface-mounted LED light, and provides general ambient lighting in commercial and industrial settings, and is the perfect choice for both new construction and retrofits. It is rated wet location.

## FEATURES

- \* Driver efficacy: 88%
  - \* Wattage: 155W/ 185W / 200W selectable
  - \* 160 Lu/W
  - \* 24,800 lm / 29,600 lm / 32,000 lm Lumens
  - \* Color temperature : 3500K, 4000K, 5000K
  - \* Long-life LEDs provide 100,000 hours of operation
  - \* Universal 120-277 AC voltage (50-60Hz) is standard
  - \* Power factor > 0.90
  - \* Beam Angle: 115 degrees
  - \* Color rendering index > 80
  - \* Waterproof rating: wet location
  - \* 0-10V dimming capability
  - \* Made of high quality material, high ignition point.
- PVC lens
- \* Working temperature: -40F - 104F

## MOUNTING

- \* V- Hook, brackets, screws, plastic tube, water-proof plug

## ORDERING INFORMATION


PART #	Selectable Color Temp	Lumens	Lumen/watt	Selectable Wattage
DTH-VBH-200W-27-3CCT	CCT: 35K, 4K,5K	24800,29600,32000	160	155/185/200



## WARRANTY & DETAILS

- \* UL listed
- \* Wet location rated
- \* Complies with FCC Part 15, class A
- \* DLC Premium 5.1 Listed
- \* 5-year warranty of all electronics and housing

## DIMENSIONS

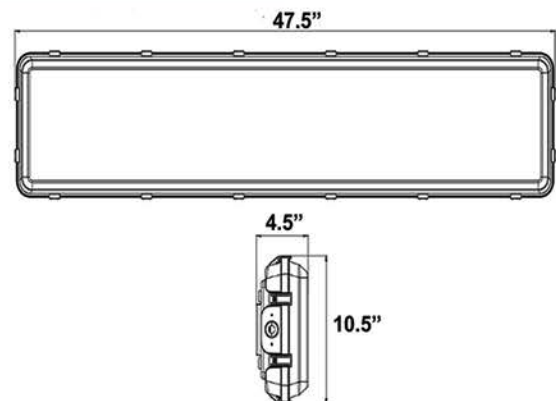



## FIELD ADJUSTABLE



## PHOTOMETRIC DATA



### 155W @ 4000k

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

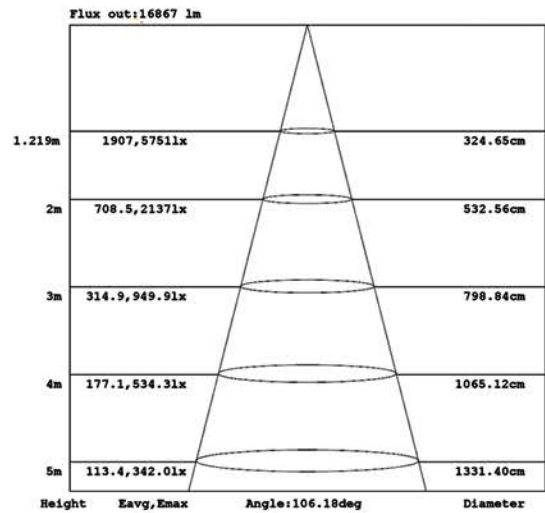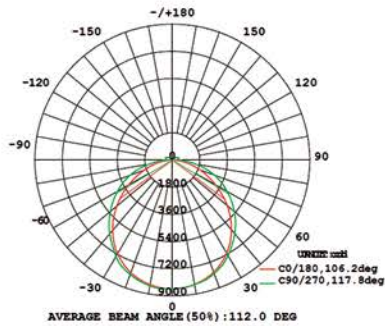

### 185W @ 4000k

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

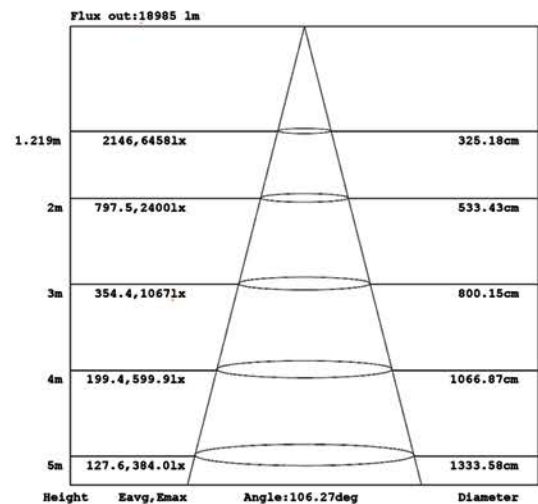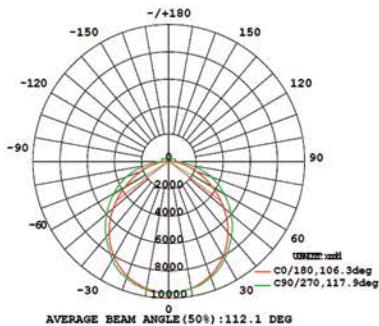

### 200W @ 4000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

